



G1609 & G1610 耐壓防爆電纜接頭

長型



- Zone 1
- Zone 2
- Zone 21
- Zone 22
- IP67
- NEMA 6

防爆等級

- Ex d IIC Gb
- Ex tb IIIC Db

螺紋規範

- ISO-IEC / EN 60423
- PF-JIS B 0202
- IEC / EN 50262
- NPT-ANSI B2.1

- 材 質: 不鏽鋼
- 操作溫度: -20°C ~ + 75°C
- 牙 型: NPT1/2", NPT3/4", G1/2", G3/4", M20, M25

產品料號	進線口規格 "A"	螺紋長度 "B"	電纜適用規格 "E"		電纜接投長度 "F"	壓緊螺栓對角 "G"	本體寬度 "K"
			最大	最小			
無雙止付 / 雙止付							
THT-2GM020UXd*0807	M20	19.7mm	8.0mm	7.0mm	66.7mm	23.0 mm	32/40mm
THT-2GM020UXd*1009	M20	19.7mm	10.0mm	9.0mm	66.7mm	23.0 mm	32/40mm
THT-2GM020UXd*1211	M20	19.7mm	12.0mm	11.0mm	66.7mm	23.0 mm	32/40mm
THT-2GG012UXd*0807	G1/2"	19.7mm	8.0mm	7.0mm	66.7mm	23.0 mm	32/40mm
THT-2GG012UXd*1009	G1/2"	19.7mm	10.0mm	9.0mm	66.7mm	23.0 mm	32/40mm
THT-2GG012UXd*1211	G1/2"	19.7mm	12.0mm	11.0mm	66.7mm	23.0 mm	32/40mm
THT-2GN034UXd*0605	NPT3/4"	18.0mm	6.0mm	5.0mm	67.3mm	28.5 mm	38/46mm
THT-2GN034UXd*0807	NPT3/4"	18.0mm	8.0mm	7.0mm	67.3mm	28.5 mm	38/46mm
THT-2GN034UXd*8575	NPT3/4"	18.0mm	8.5mm	7.5mm	67.3mm	28.5 mm	38/46mm
THT-2GN034UXd*0908	NPT3/4"	18.0mm	9.0mm	8.0mm	67.3mm	28.5 mm	38/46mm
THT-2GN034UXd*1009	NPT3/4"	18.0mm	10.0mm	9.0mm	67.3mm	28.5 mm	38/46mm
THT-2GN034UXd*1211	NPT3/4"	18.0mm	12.0mm	11.0mm	67.3mm	28.5 mm	38/46mm
THT-2GN034UXd*1413	NPT3/4"	18.0mm	14.0mm	13.0mm	67.3mm	28.5 mm	38/46mm
THT-2GN034UXd*1615	NPT3/4"	18.0mm	16.0mm	15.0mm	67.3mm	28.5 mm	38/46mm
THT-2GN012UXd*0807	NPT 1/2"	18.0mm	8.0mm	7.0mm	66.7mm	23.0 mm	32/40mm
THT-2GN012UXd*1009	NPT 1/2"	18.0mm	10.0mm	9.0mm	66.7mm	23.0 mm	32/40mm
THT-2GN012UXd*1211	NPT 1/2"	18.0mm	12.0mm	11.0mm	66.7mm	23.0 mm	32/40mm


* — A: 雙止付
B: 無雙止付

套筒與轉接頭依客戶需求提供

不含轉接頭


G1610

▼無雙止付

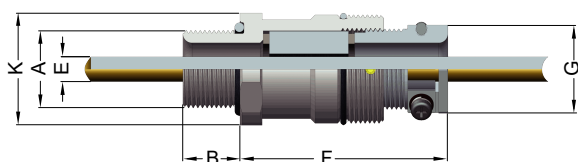

G1609

▼雙止附

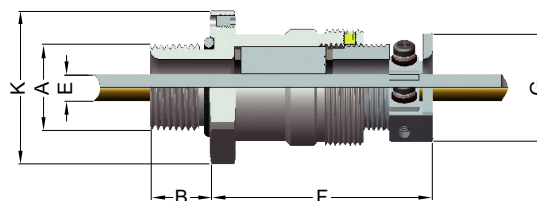

產品料號	進線口規格 "A"	螺紋長度 "B"	電纜適用規格 "E"		電纜接投長度 "F"	壓緊螺栓對角 "G"	本體寬度 "K"
			最大	最小			
無雙止付 / 雙止付							
THT-2GG034UXd*0605	G3/4"	19.5mm	6.0mm	5.0mm	67.3mm	28.5mm	38/46mm
THT-2GG034UXd*0807	G3/4"	19.5mm	8.0mm	7.0mm	67.3mm	28.5mm	38/46mm
THT-2GG034UXd*8575	G3/4"	19.5mm	8.5mm	7.5mm	67.3mm	28.5mm	38/46mm
THT-2GG034UXd*0908	G3/4"	19.5mm	9.0mm	8.0mm	67.3mm	28.5mm	38/46mm
THT-2GG034UXd*1009	G3/4"	19.5mm	10.0mm	9.0mm	67.3mm	28.5mm	38/46mm
THT-2GG034UXd*1211	G3/4"	19.5mm	12.0mm	11.0mm	67.3mm	28.5mm	38/46mm
THT-2GG034UXd*1413	G3/4"	19.5mm	14.0mm	13.0mm	67.3mm	28.5mm	38/46mm
THT-2GG034UXd*1615	G3/4"	19.5mm	16.0mm	15.0mm	67.3mm	28.5mm	38/46mm
THT-2GM025UXd*0605	M25	19.5mm	6.0mm	5.0mm	67.3mm	28.5mm	38/46mm
THT-2GM025UXd*0807	M25	19.5mm	8.0mm	7.0mm	67.3mm	28.5mm	38/46mm
THT-2GM025UXd*8575	M25	19.5mm	8.5mm	7.5mm	67.3mm	28.5mm	38/46mm
THT-2GM025UXd*0908	M25	19.5mm	9.0mm	8.0mm	67.3mm	28.5mm	38/46mm
THT-2GM025UXd*1009	M25	19.5mm	10.0mm	9.0mm	67.3mm	28.5mm	38/46mm
THT-2GM025UXd*1211	M25	19.5mm	12.0mm	11.0mm	67.3mm	28.5mm	38/46mm
THT-2GM025UXd*1413	M25	19.5mm	14.0mm	13.0mm	67.3mm	28.5mm	38/46mm
THT-2GM025UXd*1615	M25	19.5mm	16.0mm	15mm	67.3mm	28.5mm	38/46mm

* — A: 雙止付
B: 無雙止付

套筒與轉接頭依客戶需求提供